


LINDELL SERIES SAND FILTER



SIDE-MOUNT SAND FILTER

- Laminated fiberglass tank with side-mount M/V.

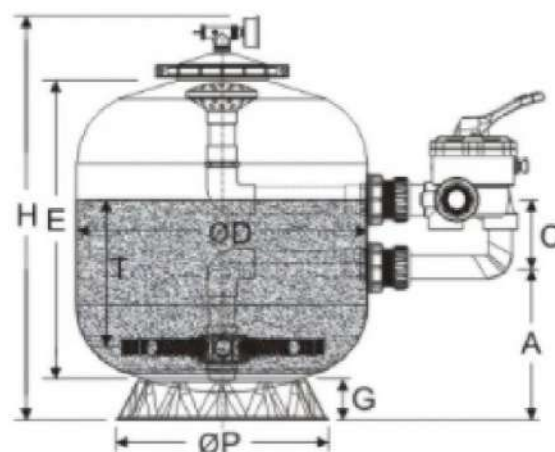

- Made of fiberglass reinforced laminated polyester.
- Smooth and high brightness appearance.
- 6-Way Multiport Valve.
- Sight glass for easy inspection of filtered water.
- Easy maintenance; easy cleaning.
- Maximum Working Pressure: 36PSI/ 2.5kg/cm².
- Maximum Operating Water Temperature: 50°C.

CODE	FR-EN-SL18	FR-EN-SL21	FR-EN-SL25	FR-EN-SL28	FR-EN-SL32	FR-EN-SL36
ΦD(mm)	450	500	635	700	800	900
H(mm)	660	745	805	885	1020	1120
A(mm)	260	280	310	360	385	430
B(mm)	75	75	95	95	115	115
C(mm)	125	125	125	125	220	220
M(mm)	444	464	494	534	680	725
ΦP(mm)	390	390	565	565	790	790
T(mm)	250	280	300	350	420	480

ORDERING INFORMATION

CODE	PRODUCTS	DIA	FLOW RATE
FR-EN-SL18	HI-RATE SAND FILTER W/1.5" SIDE MOUNT M/V	18"	8 M3/HR
FR-EN-SL21	HI-RATE SAND FILTER W/1.5" SIDE MOUNT M/V	21"	10 M3/HR
FR-EN-SL25	HI-RATE SAND FILTER W/1.5" SIDE MOUNT M/V	25"	15 M3/HR
FR-EN-SL28	HI-RATE SAND FILTER W/1.5" SIDE MOUNT M/V	28"	19 M3/HR
FR-EN-SL30	HI-RATE SAND FILTER W/ 2" SIDE MOUNT M/V	30"	22 M3/HR
FR-EN-SL32	HI-RATE SAND FILTER W/ 2" SIDE MOUNT M/V	32"	25 M3/HR
FR-EN-SL36	HI-RATE SAND FILTER W/ 2" SIDE MOUNT M/V	36"	32 M3/HR