



KS

Maximum Working Pressure
250kpa/36psi (2.5bar)
400kpa/58psi (4.0bar)

Maximum Temperature
50°C (122F)


Factory Testing Pressure
400kpa/58psi (4.0bar)
600kpa/86psi (6.0bar)

Size of Gravel
0.5mm~0.8mm (石英砂)



- UV inhibited filament wound structural fiberglass tanks.
- Manual safety pressure release.
- Large combination sand/water drain for easy winterizing.
- Sight glass for inspection of filtered water.
- KS series filter: Large clear lid is easy for interior viewing and media removal.

Model	KS1000	KS1050	KS1100	KS1200	KS1400
ØD(mm)	1000	1050	1100	1200	1400
H(mm)	1160	1230	1260	1340	1570
A(mm)	540	500	540	540	700
B(mm)	150	150	180	180	180
C(mm)	220	220	220	220	220
M(mm)	535	795	835	835	995
ØP(mm)	790	790	1010	1010	1010
T(mm)	510	530	560	600	630

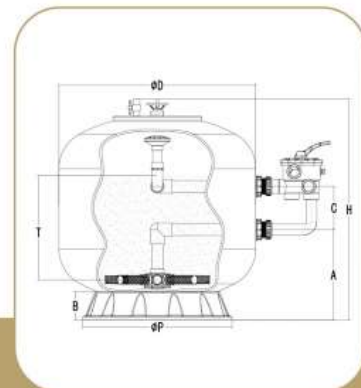

KS1000~KS1400

Model	Tank Diameter (mm)	Tank Height (mm)	Design Flow (m ³ /h)	Filter Area (m ²)	Connections (mm)	Sand Weight (kg)
KS1000	1000	1160	32	0.79	60/63	600
KS1050	1050	1230	35	0.86	60/63	700
KS1100	1100	1260	38	0.95	60/63	800
KS1200	1200	1340	40	1.13	60/63	920
KS1400	1400	1570	46	1.53	60/63	1400