

Sanitization



UV STERILIZERS

| Part Number | Product Description | Flowrate |
|-------------|--|----------|
| 37784090 | Solclear 90 UV Steriliser 40W (40mm port) | 90 LPM |
| 37784150 | Solclear 150 UV Steriliser 40W (40mm port) | 150 LPM |

7 bar rating

The Solclear UV steriliser uses environmentally friendly ultraviolet technology for the disinfection of water. It provides disinfection without the addition of any chemicals.

Applicable to:

- Fountains
- Water features
- Koi ponds


Technical Specifications

| Model | Flow Rate | | Quartz Thimble size | Inlet & Outlet size | UV Lamp | Lamp Wattage | Standard Ballasts | Controller Box Size |
|--------------|-----------|-----|---------------------|---------------------|---------|--------------|-------------------|---------------------|
| | gpm | lpm | mm | | | | | |
| Solclear 90 | 24 | 90 | D24.5x910 | 1 ½" BSP | T540 | 40W | UV-6 | 190x280 |
| Solclear 150 | 40 | 150 | D24.5x910 | 1 ½" BSP | T540 | 40W | UV-6 | 190x280 |

Lamp life : 9000 hours


Input voltage : 100-240Vac/50-60Hz

Dimension (mm)

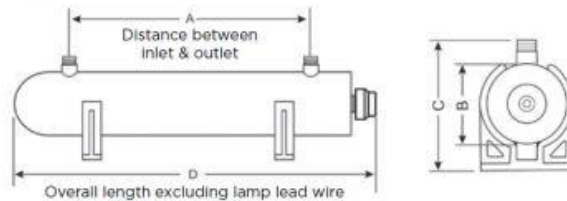

NOTE : Line cord and lamp lead wire omitted for clarity.

| Model | A | B | C | D | Inlet & Outlet Size |
|-------------|--------|---------|--------|--------|---------------------|
| Solclear 90 | 780 mm | 63.5 mm | 115 mm | 925 mm | 1 ½" BSP |

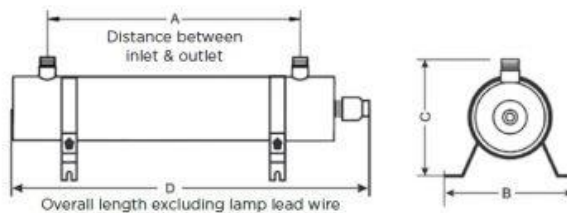

NOTE : Line cord and lamp lead wire omitted for clarity.

| Model | A | B | C | D | Inlet & Outlet Size |
|--------------|--------|--------|--------|--------|---------------------|
| Solclear 150 | 786 mm | 175 mm | 165 mm | 926 mm | 1 ½" BSP |



Motiongroup.co.th

02-115-1376