


SPA PUMP KASAI SERIES



2HP - 4HP

Performance curves

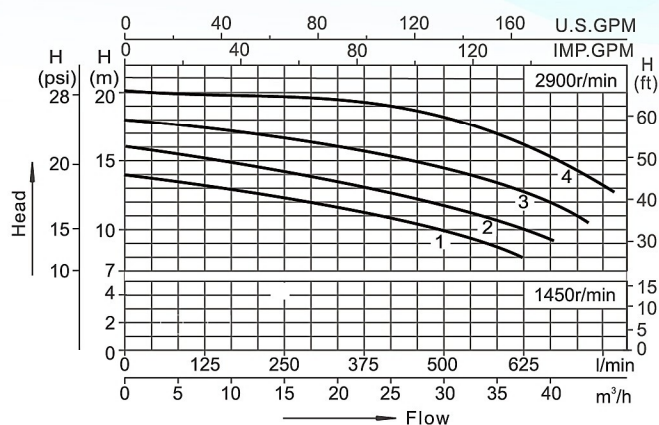

Product features :

Thermal protector : single phase & three phase

Insulation : F


Protection : IP55

Working conditions :

Medium temperature : 5~50°C

Environmental temperature : ≤50°C

Max.working pressure : 0.3MPa

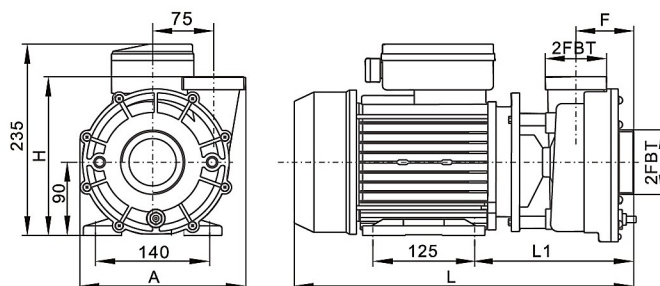

CODE	Shape size (mm)				
	A	H	L	L1	F
PM-BS-K200	202	197	416	197	73
PM-BS-K250	202	197	416	197	73
PM-BS-K300	202	197	416	197	73
PM-BS-K400	211	210	421	200	75

CODE	DESCRIPTION	VOLTAGE/HZ	PORT	CURVE KEY
PM-BS-K200	2HP SPA PUMP WITHOUT STAINER	220V/50Hz	2" x 2"	1
PM-BS-K250	2.5HP SPA PUMP WITHOUT STAINER	220V/50Hz	2" x 2"	2
PM-BS-K300	3HP SPA PUMP WITHOUT STAINER	220V/50Hz	2" x 2"	3
PM-BS-K400	4HP SPA PUMP WITHOUT STAINER	220V/50Hz	2" x 2"	4
PM-BS-K200T	2HP SPA PUMP WITHOUT STAINER	380V/50Hz	2" x 2"	1
PM-BS-K250T	2.5HP SPA PUMP WITHOUT STAINER	380V/50Hz	2" x 2"	2
PM-BS-K300T	3HP SPA PUMP WITHOUT STAINER	380V/50Hz	2" x 2"	3
PM-BS-K400T	4HP SPA PUMP WITHOUT STAINER	380V/50Hz	2" x 2"	4