

NEPTUNE



PORT 2" x 2"




Features :

Built with superior pump casing, guide vane and frame design, the Neptune Series pumps achieves optimum flow for various applications. It comes in 2" ports and an easy to lock and unlock transparent lid that permits fast access to basket.

Durable seals ensure water-tight, continuous operation for longer periods.


Motor :

- 2-Pole induction motor
- IPX5 Protection
- Insulation class F
- Thermal protection from T5 USA
- TUV and CE certified

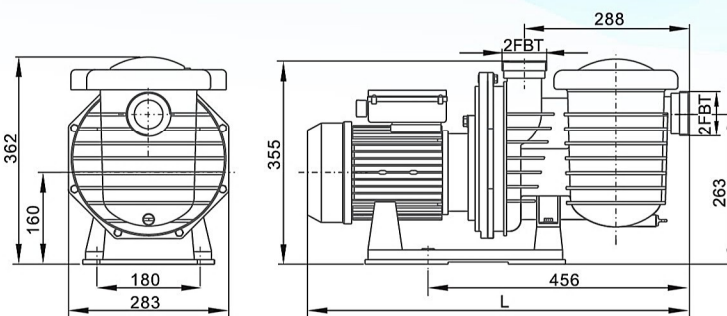

CODE	L
PM-BS-N100	635
PM-BS-N150	635
PM-BS-N200	635
PM-BS-N300	660
PM-BS-N150T	635
PM-BS-N200T	635
PM-BS-N300T	660

Performance curves

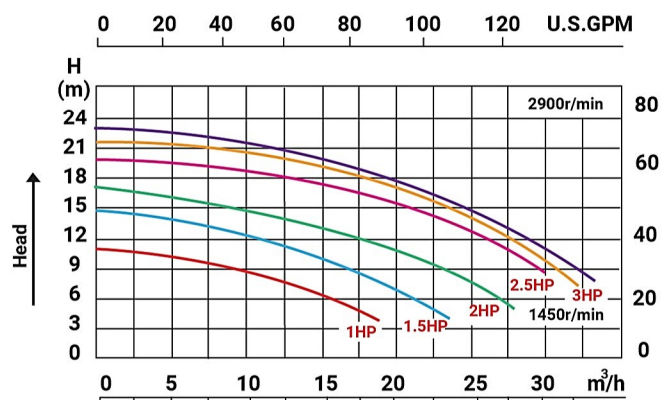

CODE	DESCRIPTION	FLOW RATE	HEAD	VOLTAGE/HZ
PM-BS-N100	1 HP SELF PRIMING PUMP W/ STRAINER	8.0 m³/ HR	10 M	220V/50HZ.
PM-BS-N150	1.5 HP SELF PRIMING PUMP W/ STRAINER	15.5 m³/ HR	10 M	220V/50HZ.
PM-BS-N200	2 HP SELF PRIMING PUMP W/ STRAINER	21.5 m³/ HR	10 M	220V/50HZ.
PM-BS-N300	3 HP SELF PRIMING PUMP W/ STRAINER	27.5 m³/ HR	12 M	220V/50HZ.
PM-BS-N150T	1.5 HP SELF PRIMING PUMP W/ STRAINER	15.5 m³/ HR	10 M	380V/50HZ.
PM-BS-N200T	2 HP SELF PRIMING PUMP W/ STRAINER	21.5 m³/ HR	10 M	380V/50HZ.
PM-BS-N300T	3 HP SELF PRIMING PUMP W/ STRAINER	27.5 m³/ HR	10 M	380V/50HZ.