


AMAZON



PORT 1.5" X 1.5"
PORT 2" X 2"

Features :

- Sintered graphite mechanical seal allow for greater corrosion and temperature resistance
- Insulation Class Fm
- IP55 Standard Motor
- TUV and CE Approved
- Inlet and outlet reinforced by a stainless steel ring
- Built in handle for convenience of installation and removal
- Transparent cover for easy basket inspection

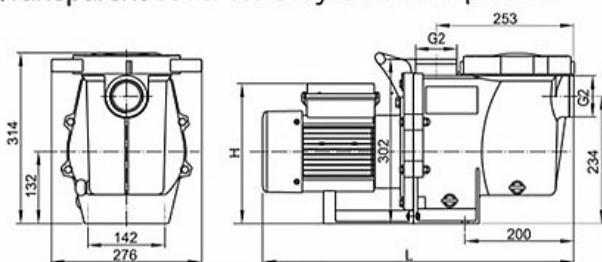


Working conditions

Medium temperature: $5-50^{\circ}\text{C}$

Environmental temperature: $\leq 50^{\circ}\text{C}$

Max.working pressure: 0.3MPa

Performance curves

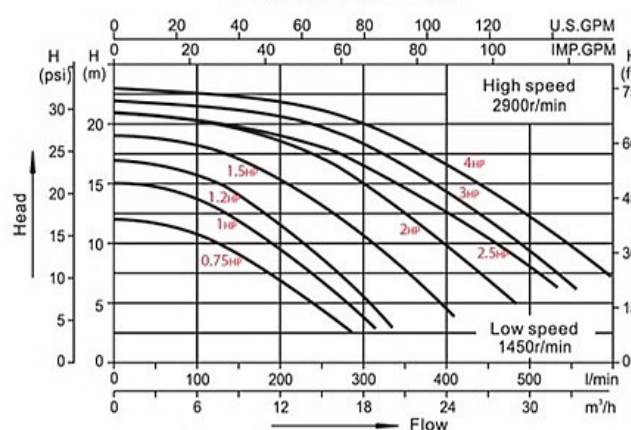

CODE	DESCRIPTION	PORT	VOLTAGE/HZ
PM-BS-B75	0.75HP SELF PRIMING PUMP WITH STRAINER	1.5" x 1.5"	220V/50Hz
PM-BS-B10	1HP SELF PRIMING PUMP WITH STRAINER	1.5" x 1.5"	220V/50Hz
PM-BS-B15	1.5HP SELF PRIMING PUMP WITH STRAINER	1.5" x 1.5"	220V/50Hz
PM-BS-B20	2HP SELF PRIMING PUMP WITH STRAINER	2" x 2"	220V/50Hz
PM-BS-B30	3HP SELF PRIMING PUMP WITH STRAINER	2" x 2"	220V/50Hz
PM-BS-B40	4HP SELF PRIMING PUMP WITH STRAINER	2" x 2"	220V/50Hz
PM-BS-B15II	1.5HP SELF PRIMING PUMP WITH STRAINER (2 SPEED)	1.5" x 1.5"	220V/50Hz
PM-BS-B20II	2HP SELF PRIMING PUMP WITH STRAINER (2 SPEED)	2" x 2"	220V/50Hz
PM-BS-B30II	3HP SELF PRIMING PUMP WITH STRAINER (2 SPEED)	2" x 2"	220V/50Hz
PM-BS-B10T	1HP SELF PRIMING PUMP WITH STRAINER	1.5" x 1.5"	380V/50HZ
PM-BS-B15T	1.5HP SELF PRIMING PUMP WITH STRAINER	1.5" x 1.5"	380V/50HZ
PM-BS-B20T	2HP SELF PRIMING PUMP WITH STRAINER	2" x 2"	380V/50HZ
PM-BS-B30T	3HP SELF PRIMING PUMP WITH STRAINER	2" x 2"	380V/50HZ
PM-BS-B40T	4HP SELF PRIMING PUMP WITH STRAINER	2" x 2"	380V/50HZ