

# DISINFECTION SYSTEMS

**BSV.**  
with you since 1984



## “BSV” Pro 50 - 150 Series Commercial Salt Chlorinators Made In Spain

**SALT WATER CHLORINATOR WITH PRODUCTIONS FROM 50 TO 150 GRAMS PER HOUR. FOR BIG DOMESTIC POOLS AND SMALL PROFESSIONAL POOLS.**

- ✓ Lower electrical consumption
- ✓ Lower weight
- ✓ Suitable in hot and humid environments.
- ✓ Lower operating temperature.
- ✓ More compact, easily adaptable to any installation.
- ✓ Switch mode power supply improves importantly the unit performance.
- ✓ Longer durability of the electrolysis cell.
- ✓ Kit flow switch already included
- ✓ Upgraded at any time by adding the optional kits.
- ✓ Digital Display, easy and intuitive control
- ✓ Cell Life Time 10,000 Hours


- When the water in the pool exceeds a temperature of 28°C regularly, select the production immediately higher than indicated by the table.
- The number of bathers per day is very important value in Semi-Public Swimming pools. If this parameter is bigger than above, the Salt Chlorinator system needs to be calculated again.



Cell For  
50 / 70



Cell For  
100 / 150

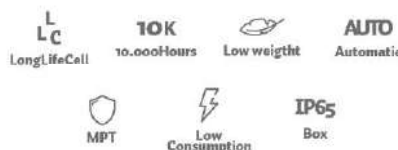

grams / hour =	$2 \text{ ppm} \times \text{Volume of Pool (m}^3\text{)}$ $+ (14 \times \text{Bading load per day})$
กรัม / ชั่วโมง =	$2 \text{ ppm} \times \text{ปริมาณน้ำในสระ (m}^3\text{)}$ $+ (14 \times \text{จำนวนคนลงสระต่อวัน})$ $\text{จำนวนชั่วโมงของระบบกรอง/วัน}$

**Start up salt quantity is 5kgs per 1 m<sup>3</sup> volume of water**

Code	Model	Gram/Hour	Recommended Pool Volume (m <sup>3</sup> ) at Turnover 8 Hours/Day	In & Outlet (Inches)
20900210055	Pro-50*	50	Up to 175 m <sup>3</sup>	2.5
20900210060	Pro-70*	70	Up to 225 m <sup>3</sup>	2.5
20900210065	Pro-100*	100	Up to 300 m <sup>3</sup>	3
20900210070	Pro-150*	150	Up to 375 m <sup>3</sup>	3

\* สินค้าไม่มีสต็อก กรุณาสั่งล่วงหน้า 30-60 วัน / No Stock, Delivery Time 30-60 Days