

"SANDIA" DBK Series Deep Bed Laminated Hi-Rate Sand Filters Complete Set With Multiport Valves


All DBK Superflow filters can operate with either silica sand or sand gravel mix. They are suitable for use in commercial applications such as spa pools, high bathing load swimming pools, fish farming, industrial water treatment, drinking water system, etc.

The depth of media (1.2 m) ensures that even the finest dirt particles are retained.


The media sight glass (optional extra) is made high quality toughened safety glass which will resist damage by erosion.

The top oval lid allows easy access to the internals whilst the large side access manhole enable easy media removal, inspection and access to the filter.


The plate and nozzle system allows a uniform undisturbed flow through the media bed for filtering. The plate system also allows the use of air purging as part of the backwash procedure, thus reducing the water required for backwashing.



Technical Information

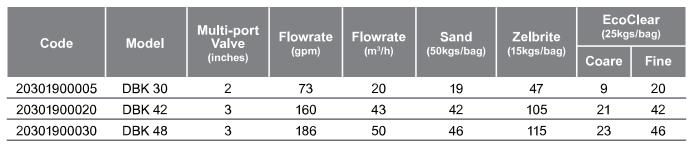







FILTERS







Product Dimensions (meter)

Туре	DBK-30	DBK-42	DBK-48
Α	0.27	0.27	0.43
В	0.23	0.23	0.33
С	0.78	1.14	1.24
D	0.32	0.46	0.46
G	0.30	0.54	0.54
Н	0.10	0.11	0.12
J	0.28	0.31	0.35
К	1.65	1.70	1.75
L	2.22	2.36	2.48
М	2.30	2.42	2.42
Ν	0.10	0.11	0.12
Х	1.50	1.51	1.53

Code	Model		Flowrate	e Flowrate (m ³ /h)	Height (cm)	Width (inches)	Sand (50kgs/bag)	Zelbrite (15kgs/bag)	EcoClear (25kgs/bag)	
			(gpm)						Coare	Fine
20301900005	DBK-30×	2	73	20	230	31.2	19	47	9	20
20301900020	DBK-42×	3	160	43	242	45.2	42	105	21	42
20301900030	DBK-48×	3	186	50	242	49.0	46	115	23	46

* สินค้าไม่มีสต๊อค กรุณาสั่งซื้อล่วงหน้า / No Stock, Delivery Time : 7 - 14 Days